

INVERTER GENERATOR 2000 W

- Maximum power of 2000 W for devices with sensitive electronics, power tools, etc.
- Equipped with two 230 V~ AC sockets and two 2.1 A USB ports (quick charging)
- Displacement of 79 cm³, air cooled 4 stroke petrol engine with pull cable starter
- Compact design in carrying case size made of impact-resistant plastic with handle
- Automatic shutdown in case of oil shortage
- A fuel tank of 4.1 L and an engine oil capacity of 300 ml
- Clean sine wave for sensitive devices such as laptops, televisions, tablets or smartphones
- Low noise level of 64,1 dB(A)*


*Noise levels may vary depending on distance and location and were measured at 25% load and at a distance of 7 metres from the control panel.



SPECIFICATIONS – ENGINE	
Model	Single cylinder; 4 stroke petrol engine
Max. engine power	3 PS
Displacement	79 cm³
Starting system	Pull cable starter
Tank capacity	4.1 L

LOGISTICAL DATA	
Net / gross weight	17.5 / 19 kg
Packaging dimensions	570 x 320 x 485 mm
Article number	5906226901
EAN	4046664134602
20 container	288 pcs
40 container	576 pcs
40 HQ container	735 pcs

SPECIFICATIONS – POWER GENERATOR	
Dimensions L x W x H	520 x 270 x 440 mm
Voltage control	Inverter
Nominal power/Maximum power	1600 / 2000 W
Voltage output	230 V~
AC frequency	50 Hz
Overload protection	Yes
Low oil warning	Yes






OPTIONAL ACCESSORIES

ENGINE OIL
ULTRA
PERFORMANCE
LONGLIFE SAE
5W-40
500 ml

Article number: 3906100701
Barcode: 4014915073512



SELF-SUFFICIENT ENERGY SUPPLY
SUITABLE FOR

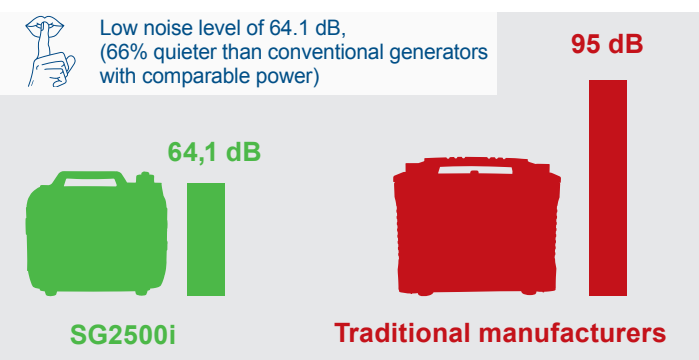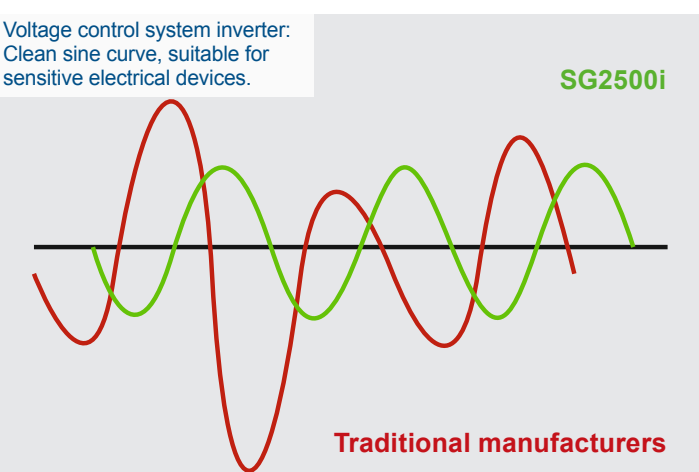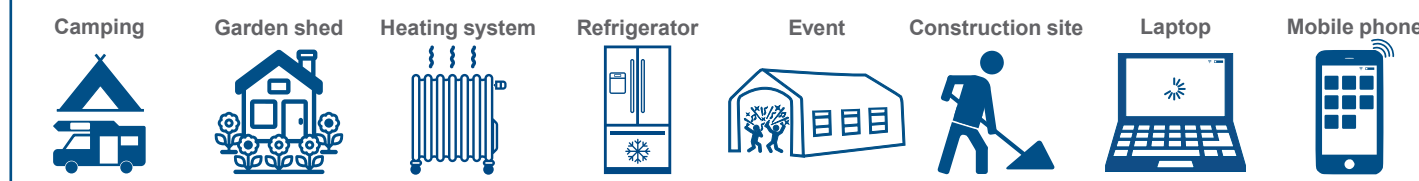

PRODUCT DETAILS

2x USB connection

2 x 230 V power outlet

Oil warning indicator

Energy saving switch

Overload protection

Fuel-saving

Lightweight

Transportable

